



223 W Rosecrans Ave., Gardena, CA 90248
T. 310-808-0102 www.blueairfse.com

Project: _____
Location: _____
Item #: _____
Model #: _____ Qty: _____
AIA #: _____ SIS #: _____
CSI Section 11400

Top Mount Reach-In Refrigerator

Model
BSF23T-L-HC

Model

BSF23T-L-HC

Cabinet Construction

- Stainless steel interior and exterior (galvanized steel back & bottom).
- High-density, HFC-free cyclopentane insulation.
- Epoxy-coated wire shelves with adjustable height.
- Four (4) wire shelves per section.
- Four (4) 4" diameter swivel casters with front brakes

Refrigeration

- Hydrocarbon refrigerant (R-290).
- Self-contained system, top-mounted compressor.
Electrodeposition-coated evaporator increases performance by maintaining the heat transfer rates over the life of the evaporator and reducing potential corrosion.
- Rear-mounted condensation pan.
- Designed to prevent water overflow and increase ventilation.
- Innovative hot gas frame heating system reduces condensation and increases energy efficiency.

Door

- Alarm sounds when door is not completely closed to protect against food spoilage.
- Self-closing door (door close at 90° or less).
- Automatic hold-open door feature at 110°.
- Durable, easy-to-replace door gasket.
- Lifetime-guaranteed, heavy-duty, all-metal door handle (Ni-Cr-plated).
- Door designed for easy opening.
- Door equipped with pressure relief valves to eliminate vacuum pressure.
- Standard door lock.

Design & Features

- LED interior lighting.
- Self-diagnostic digital temperature control and monitoring system.
- Digital display allows for easy monitoring.
- Digital controls include manual defrost for easy maintenance.
- Rounded corner design gives a stylish appearance and reduces chances of injury.

Temperature range of -10°F to 5°F

- Air guard on rear wall ensures proper air circulation and cooling.




Model	Doors	Shelves	Capacity (Cu.ft.)	HP	AMPS	W x D* x H† (inches)	Crated Weight (lbs.)
BSF23T-L-HC	1	4	23	1/2	4.9	26 ³ / ₄ x 30 ⁷ / ₈ x 77 ⁵ / ₈	282


Top Mount Reach-In Refrigerator

PLAN VIEW


(Unit: inches)

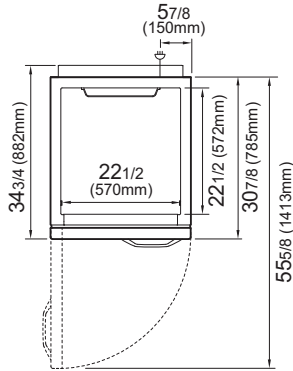

TOP VIEW

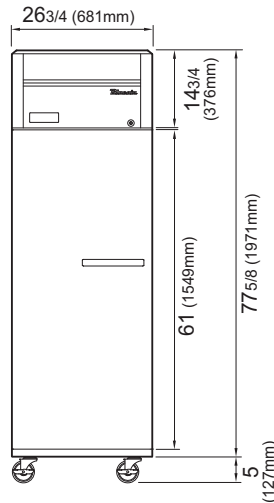

FRONT VIEW

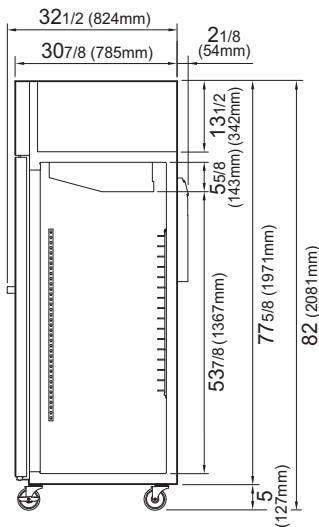

SIDE VIEW

Model

BSR23T-L-HC

Voltage	115V/60Hz/1ph
NEMA Config.	 NEMA 5-15P
AMPS	4.9
HP	1/2
Cord Length (ft.)	9.8
Refrigerant	R-290
Ext. Width (inches)(mm)	26 3/4 (681mm)
Ext. Depth (inches)(mm)*	30 7/8 (785mm)
Ext. Height (inches)(mm)†	77 5/8 (1971mm)
Doors	1
Shelves	4
Net Capacity (cu. ft.)	23
Net Weight	258 lbs. (117 kg)
Gross Weight	282 lbs. (128 kg)

Specifications subject to change without notice.

* Depth does not include 1-1/2" for door handle and 2-1/8" for rear mechanical components.

† Height does not include 5" for caster height.

Warranty

5 Year Parts and Labor Warranty
7 Year Compressor Warranty

Standard Features

- Four (4) 4" diameter casters with front brakes
- Door lock
- Hot gas frame heating system
- Self-contained system

Optional Accessories

- 2" dia. stem casters:
 8020-21-HDP (without brake), 8020-21-HDP-TLB (with brake)
 Overall height: 79-7/8" (2028mm)



223 W Rosecrans Ave., Gardena, CA 90248
 T. 310-808-0102

 blueairfse.com
 orders@blueairfse.com