Bluenix by BLUENIX

MODEL BGF72B-HC

GLASS DOOR MERCHANDISER FREEZER

Sleek and durable cooling solution for your food and beverages.



Triple pane glass
Triple pane glass techonology keeps food and beverage colder & fresher efficiantly

Temperature range between -10°F ~ 5°F
Air guard on rear wall ensures proper air circulation and cooling.

Hydrocarbon refrigerants (R-290)
Increases energy HFC refrigerants. It is safer for the environment and does not cause ozone depletion.

Visual and audible door open alarm
Alarm sounds when doors are not completely closed to protect against food spoilage

Exterior Dimensions (inches/mm)		
L	D	H
78 1/8″ 1985 mm	31 1/2″ 800 mm	84″ 2135 mm

Weight (lbs/kg)	
Net Weight	Ship Weight
678 lbs 308 kg	738 lbs 336 kg

Cabinet construction

- Black or white painted steel exterior and white painted steel interior
- Cyclopentane Insulation – Contains no hydro-fluorocarbons (HFCs) and is environmentally friendly.
- Sturdy, epoxy coated wire shelves with adjustable shelving height
- 4 shelves per compartment.
- Four 4″ Diameter swivel casters with front brakes standard.

Refrigeration

- Self-contained system, bottom mounted compressor
- Electrodeposition coated evaporator increases performance by maintaining the heat transfer rates over the life of the evaporator and reducing potential corrosion.
- Self-contained system, bottom mounted compressor provides quick and easy maintenance.
- Epoxy coated evaporator reduces potential corrosion
- Bottom mounted condensation pan.
- Designed to prevent water overflow and increase ventilation.
- Front sliding refrigeration unit allows the unit to be serviced without being moved.


5 YEAR WARRANTY PARTS & LABOR

7 YEAR WARRANTY COMPRESSORS


c UL us LISTED Intertek
Conforms to NSF/ANSI 7(ETL)

Natural REFRIGERANT


Front view

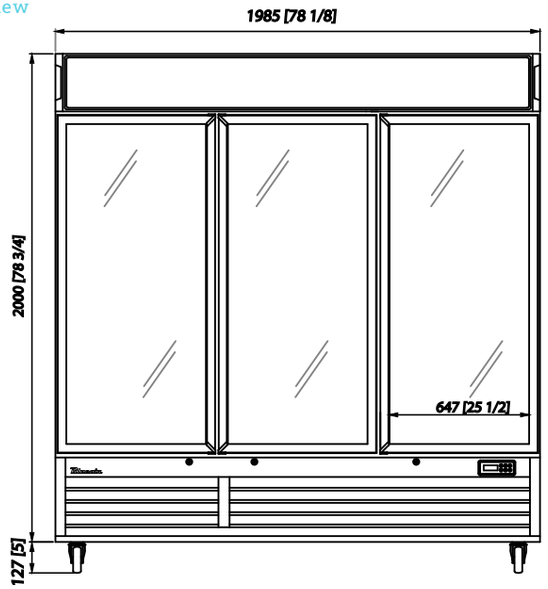

Side view

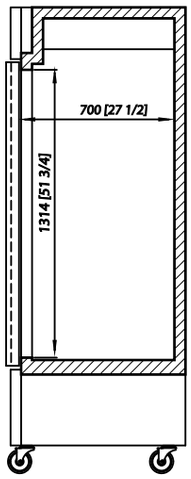

Top view

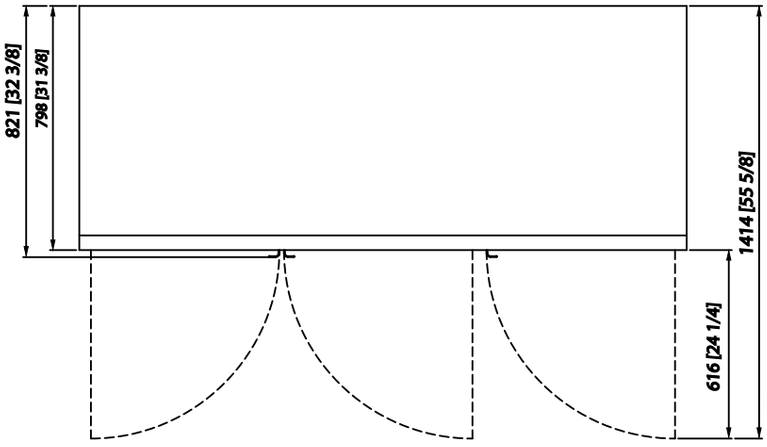

Doors

- Self-closing doors (doors close at 90° or less)
- Automatic hold open door feature at 110°.
- Durable door gasket with easy replacement.
- Door designed to open easily.
- Doors built with pressure and with pressure relievers to eliminate vacuum pressure.
- Standard door locks.
- Triple pane glass technology for energy efficiency.

Design & Features

- Digital temperature control & monitor system
- Keep products safe by maintaining constant temperatures
- Digital display allows for easy monitoring.
- Programs interpet the condition of refrigeration
- Controls include automatic evaporator fan motor delays

Optional Features & Accessories

- 2.5" diameter casters available
- 6" adjustable legs available
- Additional shelves are available.

Doors	3
Capacity Cu.Ft.	65.3
Shelves	12
Refrigerant	R-290
Temperature Range	-10°F ~ 5°F
Easy Maintenance	Sliding Condensing Unit
Connection	9.8 ft long (3m) flexible three wire cord with modeled plug
Lighting	LED Interior lighting
HP	3/4 x 2
Voltage	115V/60Hz
Amps	18.0
NEMA Config.	NEMA 5-20

- This product may exprose you to chemicals including Diisononyl Phthalate(DINP), which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.
- Ce produit peut vous exposer á des agents chimiques incluant le Diisononyl Phthalate(DINP), reconnu par l'Esat de Californie comme causant le cancer, Pour de plus amples renseignements, consulter le site www.P65Warnings.ca.gov.

Blueair by BLUENIX

Blue Air has right to change specifications without further notice.

blueairfse.com

orders@blueairfse.com

223 W. Rosecrans Ave., CA 90248
T: 310-808-0102

9 W. Shelton Terrace #A, Hillside, NJ 07205
T: 470-625-0182

7025 Amwiler industrial Drive, Suite A, Atlanta GA
T: 908-688-0970